

SCREENED BIFOLD DOOR SPECIFICATIONS


- Suitable for tall openings – up to 2700mm high
- Suitable for wide openings – up to 3000mm wide single span (2400mm high), 5900 wide double span
- Child friendly operation – simple magnetic catch – operable from any height
- No slamming and cushioned impact resistance
- Universal release position – screen can be opened to any distance and will stay in its resting location
- Load Balancing Technology (LBT™) & Tight Technology™ leaves the mesh straight, tight and at maximum tension at all times
- Self Feeding – if mesh is blown, bumped or pulled out of its track it will quickly self feed itself back into the track when rolled away
- 10 year warranty against manufacturing defects to all Door Screen components
- Only available with open out bifold doors

| SCREENED BIFOLD DOOR | |
|----------------------|-----------------------|
| max panel weight | 40 kgs |
| max panel width | 1000mm |
| MAX FRAME SIZES | |
| double screen | 2400mm(H) x 5900mm(W) |
| | 2700mm(H) x 4800mm(W) |
| single screen | 2400mm(H) x 3000mm(W) |
| | 2700mm(H) x 2400mm(W) |


HOW TO ORDER

When ordering please specify both sizes a) Overall Frame Width (measured from outer metal housing to outer metal housing) and b) Jamb Width (measured from outer jamb to outer jamb). Speak to your builder or call Homeview for more advice and installation details.


Important note: Do not allow any fixings to penetrate the screen housing or the screen will be damaged

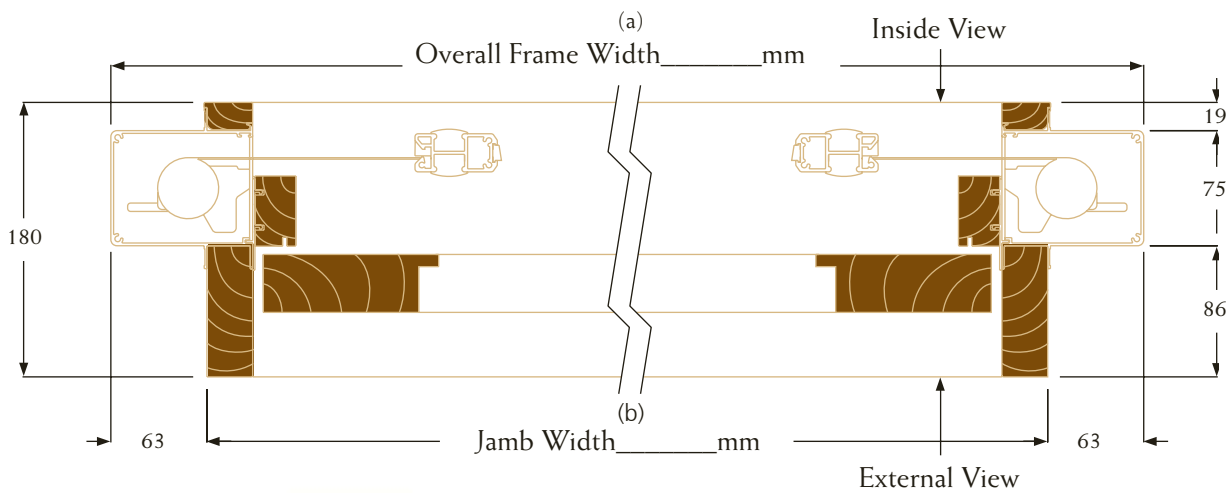

EXISTING CONSTRUCTION INSTALLATION – BRICK VENEER

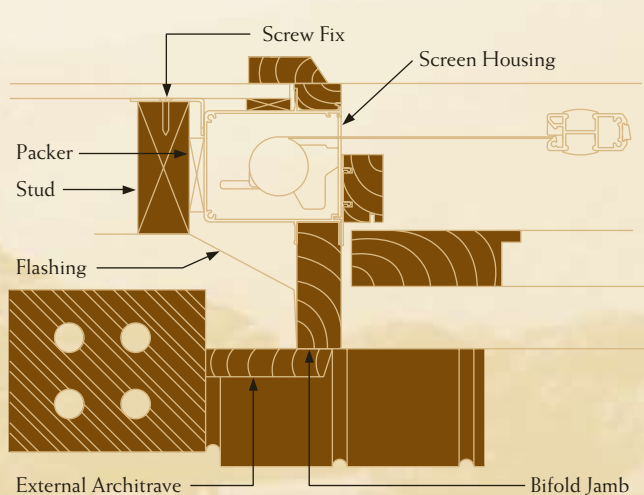

NEW CONSTRUCTION INSTALLATION – BRICK VENEER

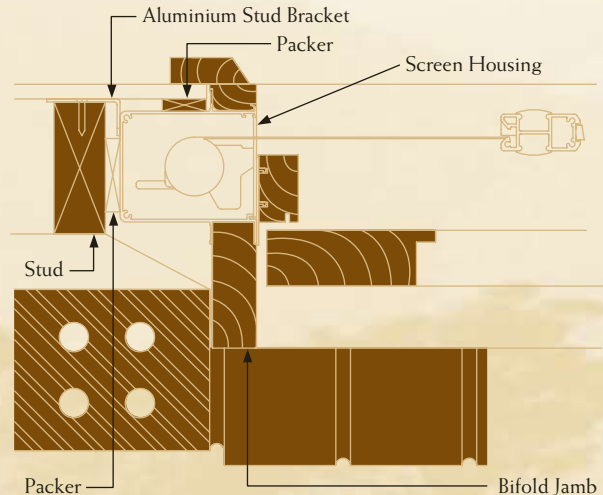

Our commitment to continual product development necessitates that sizes and specifications may change without notice.